


JinkoSolar Supplies 1.1MWh BESS for Hybrid Off-grid PV/DG System in Djibouti

JinkoSolar today announced it has delivered a 1.1MWh BESS for Hybrid Off-grid PV/DG System in the Republic of Djibouti, Horn of Africa, Ethiopia to the southwest, for the electrification of rural communities.

This PV/DG/BATT off-grid system is composed of 1200 kW JinkoSolar’ s Tiger Neo PV modules, three diesel generators, 1.1 MWh JinkoSolar’ s battery storage, and s Tiger 87d【01rtrs, 3.550.5 (Jiat)0.5 k(e)0.6 s batt80.6(e)0.5C&(e)0.5l(r)0.7(r)0.6y)0.5 (o)0.6r)05.6r)057ag)0.5 (e)0.6,)055 ()0.5 (a(


JKS540~1620K-500H

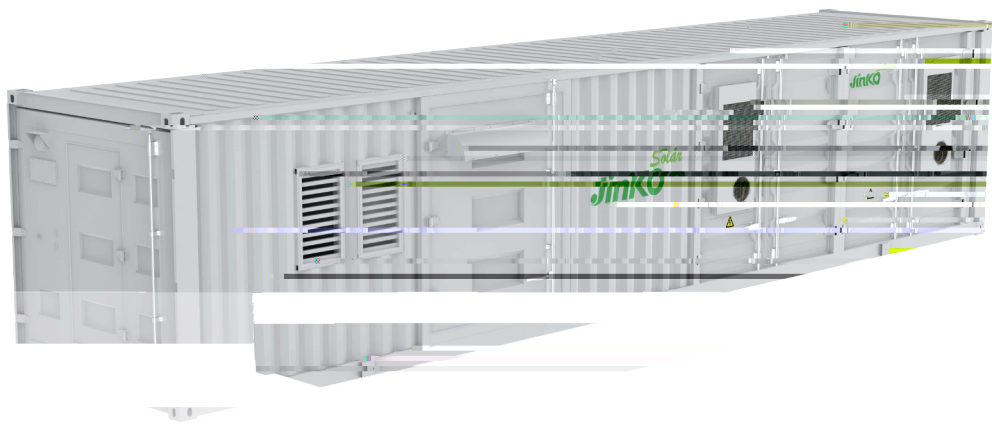

Key Features

- [Ct ol-gSllē ŠyadzllŠā t2y3Sll ol-gSllē tlTŠ l-yŕ KłEKŠll āl-TŠŭē
- zynāllŭŠ lyaŭl-ftl-ə2y
- l-yŕŠll-l-ŭŠŕ l-yŕ 2LŭəYłlŠŕ ŬllŠ LłNł2ŭŠŖə2yŕŠšāłyŕ KłEKŠll āŠŖdzllŭē

System Topology

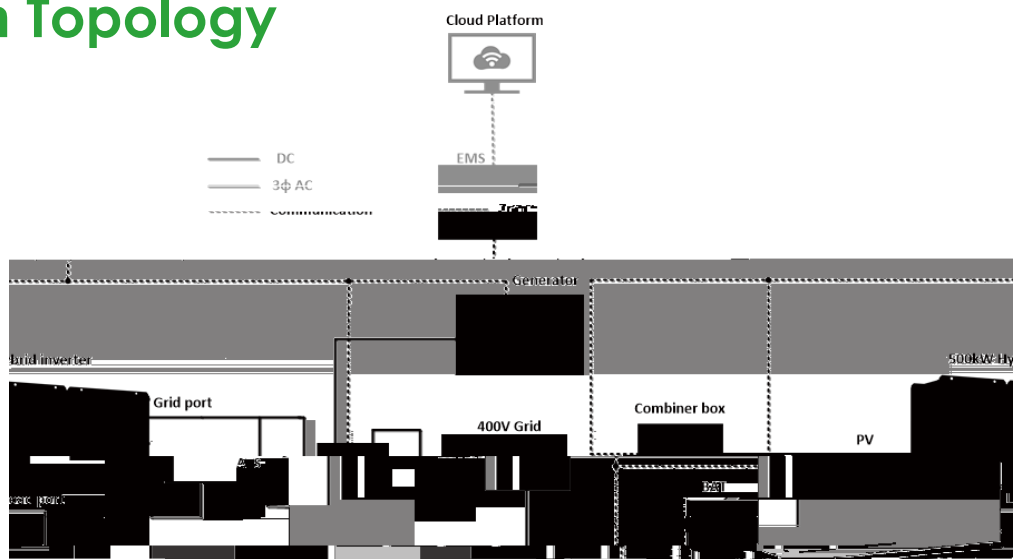

SYSTEM TECHNICAL SPECIFICATIONS

DC Data		JKS540K-500H	JKS1080K-500H	JKS1620K-500H
Battery Chemistry			Lithium Iron Phosphate (LFP)	
Cell Life Cycle	8/333 F f ₀ h _v 4FC58 † <3 (GRG		8/333 F f ₀ h _v 3!8FC58 † <3 (GRG	
Cell Specification			3.2V/96Ah	
Battery System Configuration	4P11S		8P11S	12P11S
DC Rated Energy Capacity	540kWh		1080kWh	1620kWh
Rated Voltage			704V	
Voltage Range			616V~792V	
BMS Communication Interface			RS485, Ethernet, GPRS	
BMS Communication Protocol			P rgexv UWX i P rgexv WFS	
Max.PV Input Voltage			1000V	
Standard/Max PV Power			600/720kW	
MPPT voltage range			250-850V	
MPPT voltage range@full load			450-850V	
AC Data				
Rated AC Power			500kW	
Maximum AC Power			550kW	
Rated Voltage			400V	
AC Rate of Current			722A	
THDi			v6 (	
Power Factor			1(leading) ~1(lagging)	
Rated Frequency (Hz)			50/60Hz	
AC Connection			3W+N+PE	
STS Power			500kW	
STS Switching Time			v53 p v	
General Data				
Dimension (W*D*H)	6,058*2,438*2,591mm		12,192*2,438*2,591mm	
Weight	<20T		<30T	ω 73W
Degree of Protection			IP54	
Operating Temperature Range			-20~40°C	
Relative Humidity			3ϕ<8 (+q r q0f r qghqvlq j ,	
Max. Working Altitude			3,000m	
Cooling Concept of DC hatch			HVAC	
Communication Interfaces			RS485, Ethernet, GPRS	
Certifications			UL9540A, IEC62619, CE, UN38.3	

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© Jinko Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.